


ISO 9001:2008
ISO 22000:2005

 **NICHROME**



FILPACK VISCO COMBO

Cream | Mayonnaise | Drinking Yogurt | Ketchup

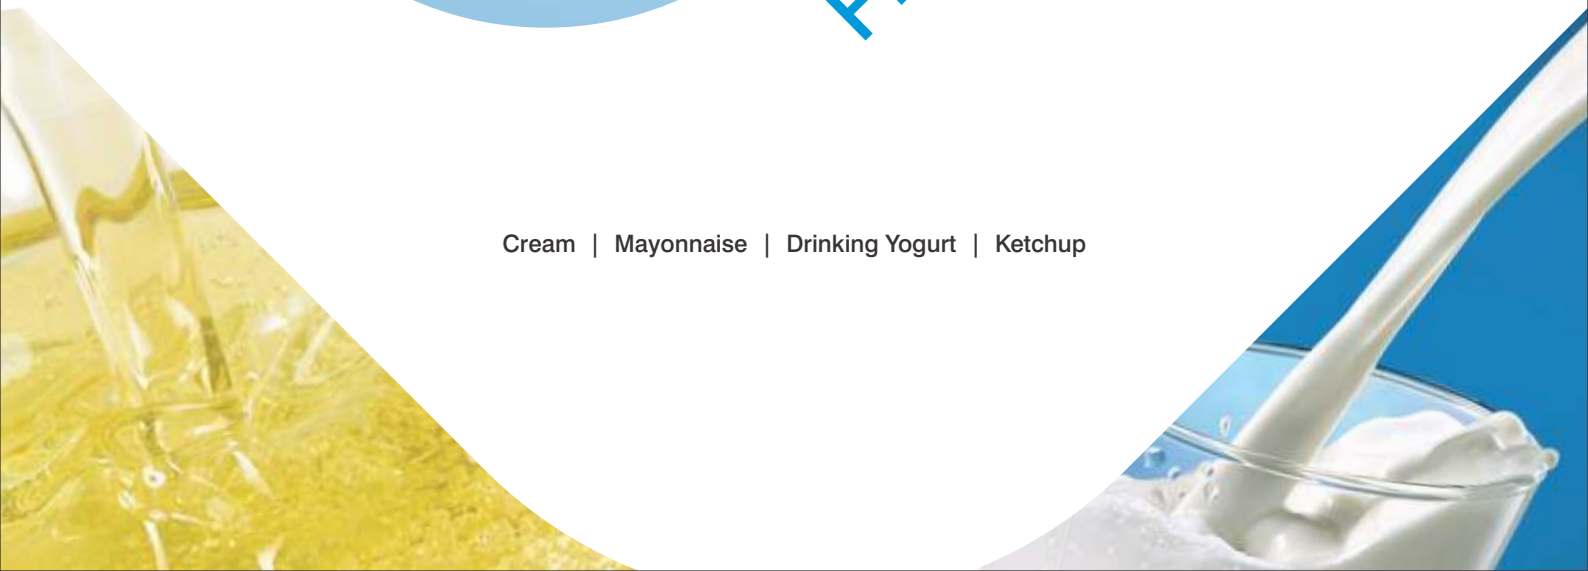

Salient Features

- Equipped with operator friendly advanced electronic controller
- Consistent fill accuracy
- Product contact parts in SS
- High fatigue tolerance clutch brake combination unit for bag pulling mechanism for both the tracks
- UV sterilization of packaging film
- Impulse seal system using dual stage thyristorised controls
- Suitable for co-extruded virgin films
- Lower air consumption compared to conventional electro-pneumatic machines
- Enclosed SS cabinet construction
- Pneumatically operated volumetric piston filler suitable for viscous products

Options

- PLC based control system
- Dual drive system available for use of panel printed films
- Single head machines available

Technical Specifications

Bagger Speed (max upto)	4500 pouches / hr
Pack Size Range	
Quality Range	200 ml, 500 ml and 1000 ml
Min Pouch Size (WxL) approx.	150 mm x 70 mm
Max Pouch Size (WxL) approx.	150 mm x 250 mm
Packaging Material	Virgin eg. Polythelene Optional model for laminate available
Electrical Supply	415 V AC, 50 Hz, 3 ph 4 wire
Cooling Water	
Flow rate	120 litres / hr @ maintained temperature
Compressed Air	@ 56 meter ³ / hr @ 6 bar
Suggested Operating Height	5100 mm
Machine Dimensions (W x D x H) approx	1545 mm x 845 mm x 3600 mm



Optional Accessories

- Date Batch Coder using either ink printer or Embossing attachment on vertical seal
- Tamper evident solution available
- Automatic CIP system
- Pouch take up conveyor with counting system
- Automatic pouch counting and crating system

Pouch Styles



Centre Seal
Pillow Pouch



Registered Office : Safire Park Galleria, 4 Pune - Mumbai Road, Shivajinagar, Pune : 411005 (India)
Phone : +91-20-66011001 Fax : +91-20-66011010 E-mail : marketing@nichrome.com Website : www.nichrome.com
Factory Site : 'Shrimal', Wing, Taluka - Khandala, District - Satara
Offices and Service Centres at : India ASEAN Middle East SAARC CIS Africa USA



Continuous up-gradation is our policy. The machine photographs and specifications are subject to change.
The specifications, performance parameters are product dependent & subject to change due to our policy of continuous innovations.